



TECHNICAL DATA SHEET

Oceania

CONCRETE SWIMMING POOL PAINT

INTERIOR / EXTERIOR

7XX Series Chlorinated Rubber Flat

DESCRIPTION

OCEANIA 7XX is a flat finish Chlorinated Rubber resin-based paint for interior and exterior concrete pools. OCEANIA 7xx is specially designed to resist swimming pool chemicals and UV rays. It can be used for residential, commercial and institutional swimming pools.

USE

OCEANIA 7XX is an interior and exterior concrete pools paint. It can be applied directly to concrete (minimum 28 days of curing if new) also to refresh a pool already painted with a compatible chlorinated rubber product. Can be used for swimming pools treated with salt or chlorine as well as heated or not. Suitable for residential, commercial and institutional projects


ADVANTAGES

- Easy to apply
- Resists various water sanitizers with proper concentrations of chemicals.
- Durable and waterproof
- UV resistant

LIMITATIONS

- Avoid application at temperatures below 10 ° C
- Avoid application if rain is imminent within the next 24 hours.
- Avoid applications at temperatures above 30 ° C
- Do not apply in direct sunlight
- Do not apply to fiberglass
- Do not mix with other paints
- Do not apply on a wet surface
- Shock treatments with a very high concentration of chemicals could affect the color.

COLORS AVAILABLE

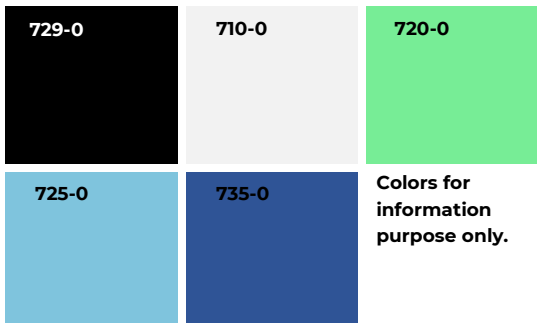

TECHNICAL DATA

Resin	Chlorinated Rubber	
Colours	Premix colours	
Cleaning	Xylene	MF-SOL435
Solvent (5% for the first coat only)	Xylene	MF-SOL435
Flash Point	-18	°C
Inflammability	N/A	
Solids by weight	67	%
Solids by volume	45	%
VOC	<340	g/l
Gloss	60°	2,5-5,0 %
Sheen	85°	2,5-5,0 %
The value is measured from the white. It may vary depending on the color		
Standards	N/A	

APPLICATION DATA

**At 25° Celsius				
Relative humidity at 50%				
May differ depending on the colour				
Spreading Rate	23-33 m ²			
<small>May vary depending on the surface porosity</small>	(250-350)sqft	gallon		
Film Thickness	Wet	6,41-4,58	mils	
	Dry	2,9-2,1	mils	
Drying Time**	Tack free	2	hours	
	Recoat time (see exterior application)	12-24	hours	
	Indoor swimming pool filling	14	days	
	Outdoor swimming pool filling	7	days	
Application	Temperature	10-30	°C	
	Brush	√		
	Roller	10	mm	
	Spray airless (Nozzle 0,013-0,017)*	2000-2500	lb/po ²	
<small>*This data may vary depending on the equipment of a manufacturer</small>				
Exterior application and condition				
All colours	Add 24 hours of drying / for each rainy day	24	hours	
Storage	Temperature between	10 et 30	°C	
Premix	Formats		Industrial colorants 844	
	946ml	3,78L	18,9L	
710-0 White		√	√	max. 2 oz of colorant/3,78 L
720-0 Green Aqua		√	√	N/A
725-0 Blue Ocean		√	√	N/A
729-0 Black		√	√	N/A
735-0 Royal Blue		√	√	N/A



TECHNICAL DATA SHEET

Oceania

CONCRETE SWIMMING POOL PAINT

INTERIOR / EXTERIOR

7XX Series
Chlorinated Rubber
Flat

SURFACE PREPARATION

The surface should be dry and clean: Remove all accumulated debris, such as fallen leaves, scrape off peeling paint and clean with TSP or Cleaner degreaser and power rinse with a 3500psi high pressure washer to remove all contaminants, deposits and non adherent paint and or particles.

On an already painted surface (with chlorinated rubber), if the paint is in good condition, clean with a degreaser (TSP) or a similar cleaner / degreaser to remove any contaminant that may affect adhesion. Scrub the water line to dislodge any grease from cosmetics and sunscreens etc.... Scrub the entire surface with the cleaner to remove any contaminants such as chalking and grease. To remove the lime present on certain bare spots (concrete) or on the old Oceania paint, use muriatic acid diluted to 20-30% by brushing (always pour the acid into the water and not the reverse) repeat the operation with muriatic acid until no more reaction is seen. **Rinse generously with clear water and several times to leave no trace of acid** and allow to dry. Then sand with 150-180 grade paper to create a profile. Vacuum sanding dust before applying paint.

Presence of mold: Clean the affected area with a mixture of 1 part bleach to 3 parts water. Rinse the entire surface thoroughly and allow it to dry.

Concrete:

If the concrete is new, wait for the concrete to harden at least 28 days before painting it. **If the existing concrete has been refurbished and all old paint has been removed,** repair cracks and defects using suitable products compatible with OCEANIA paint.

For both cases, neutralize the surface with a 30% solution of muriatic acid, rinse generously with clear water and several times, if the acid still reacts by forming bubbles, repeat the neutralization operation if not, let dry 3-5 days. Perform the condensation test to make sure the concrete is completely dry. Condensation should not be present before the application of Oceania 7XX, if necessary, allow to dry an additional day. If the concrete is smooth, it is important to create a profile by sanding mechanically in order to promote adhesion

APPLICATION

Mix well before use. This product is ready to use and does not require dilution. However, it is recommended to dilute by 5% with xylene for only the application of the first coat on bare concrete. Apply two coats in total. Allow a minimum drying time of 12 to 24 hours between each coat (see table Application characteristics). Avoid application if rain is expected in the following hours. In case of rain after application allow 24 hours more drying for each day of rain. Use a good quality 10mm roller and a bristle brush. For application with a spray gun refer to the data indicated in the table of application characteristics. Clean rollers and brushes with xylene after use.

Ventilate well when applying on indoors pools to remove solvent vapors that may become trapped between coats and affect drying time.

MAINTENANCE

A visual assessment of the surface is recommended annually. If you see signs of chipping and cracking, clean, remove all paint with weak adhesion by scraping, sand this surface, then touch up it with tow coats. Touch-ups may have a slightly different color with the original one. By doing so, you will extend its longevity.

WARRANTY

This product will give complete satisfaction if applied according to the manufacturer's instructions. In the event that it is found to be defective after inspection, the manufacturer's liability is limited to the replacement of the product and does not include labor during the application

CAUTIONS

- Maintain good ventilation during interior application
- Keep out of the reach of children.
- Keep container closed when not in use.
- Avoid freezing.
- Store in a well-ventilated place without an ignition source at a maximum temperature of 35 ° C.
- Do not breathe the toxic fumes. It is necessary to wear a suitable filter mask.
- Wear protective gloves and safety glasses.
- Ground container and pump when spraying.
- Empty containers may contain flammable and explosive vapors.

Contact your municipality to dispose of the container in an environmentally-friendly manner.